

HEADER CABLES EXAMPLES



Shielded 2 wire AWG24
microphone cable

DIN F 5P BAL
XLR M 3P BAL



Shielded 2 wire AWG24
microphone cable

DIN F 5P BAL
JACK TRS 6,3 MN BAL



Shielded 2 wire AWG24
microphone cable

DIN F 5P UNBAL
JACK TS 6,3 MN UNBAL




PIN 1 = MASSA / GND
 PIN 2 = CALDO / HOT
 PIN 3 = FREDDO / COLD

PIN 1 = MASSA / GND
 PIN 2 = CALDO / HOT
 PIN 3 = FREDDO / COLD

Shielded 2 wire AWG24
microphone cable

XLR F 3P BAL
XLR M 3P BAL




PIN 1 = MASSA / GND
 PIN 2 = CALDO / HOT
 PIN 3 = FREDDO / COLD

TIP = CALDO / HOT
 RING = FREDDO / COLD
 SLEEVE = MASSA / GND

Shielded 2 wire AWG24
microphone cable

XLR F 3P BAL
JACK TRS 6,3 MN BAL




PIN 1 = MASSA / GND
 PIN 2 = CALDO / HOT
 PIN 3 = MASSA / GND

TIP = CALDO / HOT
 SLEEVE = MASSA / GND

Shielded 2 wire AWG24
microphone cable

XLR F 3P UNBAL
JACK TRS 6,3 MN UNBAL



TIP = CALDO / HOT
 RING = FREDDO / COLD
 SLEEVE = MASSA / GND

TIP = CALDO / HOT
 RING = FREDDO / COLD
 SLEEVE = MASSA / GND

Shielded 2 wire AWG24
microphone cable

JACK TRS 6,3 MN BAL
JACK TRS 6,3 MN BAL




TIP = CALDO / HOT
 SLEEVE = MASSA / GND

TIP = CALDO / HOT
 SLEEVE = MASSA / GND

Shielded 2 wire AWG24
microphone cable

JACK TRS 6,3 MN UNBAL
JACK TRS 6,3 MN UNBAL




TIP = CALDO / HOT
RING = FREDDO / COLD
SLEEVE = MASSA / GND

PIN 1 = MASSA / GND
PIN 2 = CALDO / HOT
PIN 3 = FREDDO / COLD

Shielded 2 wire AWG24
microphone cable

JACK TRS 6,3 MN BAL
XLR M 3P BAL



TIP = CALDO / HOT
SLEEVE = MASSA / GND

PIN 1 = MASSA / GND
PIN 2 = CALDO / HOT
PIN 3 = MASSA / GND

Shielded 2 wire AWG24
microphone cable

JACK TS 6,3 MN UNBAL
XLR M 3P UNBAL



PIN 1 = FREDDO / COLD
PIN 2 = MASSA / GND
PIN 3 = CALDO / HOT
PIN 4 = +24VDC
PIN 5 = PRIORITA' / PRIORITY

PIN 1 = FREDDO / COLD
PIN 2 = MASSA / GND
PIN 3 = CALDO / HOT
PIN 4 = +24VDC
PIN 5 = PRIORITA' / PRIORITY

Shielded 4 wire AWG23
microphone cable

DIN M 5P BAL
DIN M 5P BAL



PIN 1 = FREDDO / COLD
PIN 2 = MASSA / GND
PIN 3 = CALDO / HOT
PIN 4 = +24VDC
PIN 5 = PRIORITA' / PRIORITY

PIN 1 = FREDDO / COLD
PIN 2 = MASSA / GND
PIN 3 = CALDO / HOT
PIN 4 = +24VDC
PIN 5 = PRIORITA' / PRIORITY

Shielded 4 wire AWG23
microphone cable

DIN F 5P BAL
DIN M 5P BAL




TIP = SINISTRO / LEFT
RING = DESTRO / RIGHT
SLEEVE = MASSA / GND

TIP = SINISTRO / LEFT
RING = DESTRO / RIGHT
SLEEVE = MASSA / GND


Shielded 2 wire AWG24
microphone cable

JACK TRS 6,3 MN UNBAL
JACK TRS 6,3 ST UNBAL

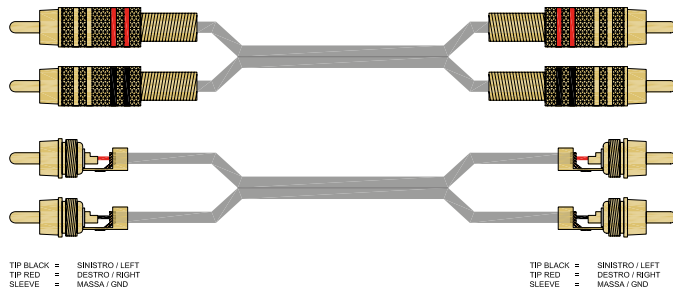


Shielded 2 wire AWG26
microphone cable

2 X RCA ST UNBAL
2 X RCA ST UNBAL

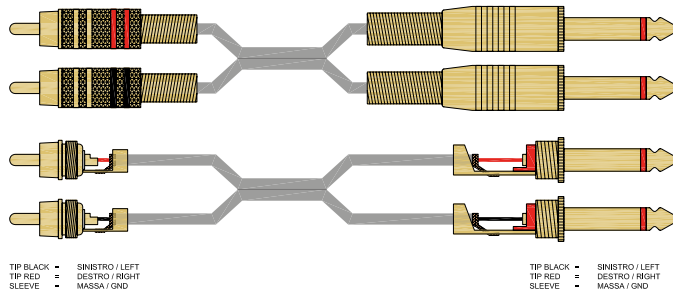


Shielded 2 wire AWG26
microphone cable

2 X RCA ST UNBAL
2 X JACK TS 6,3 ST UNBAL

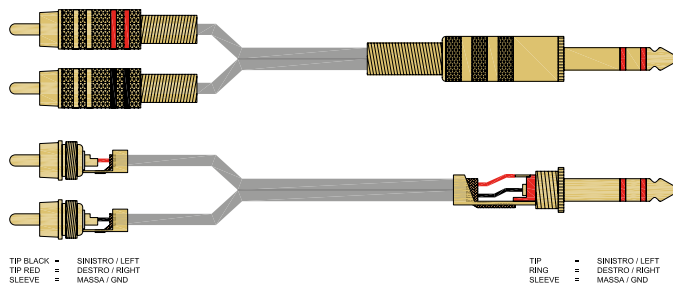


Shielded 2 wire AWG26
microphone cable

2 X RCA ST UNBAL
JACK TRS 6,3 ST UNBAL

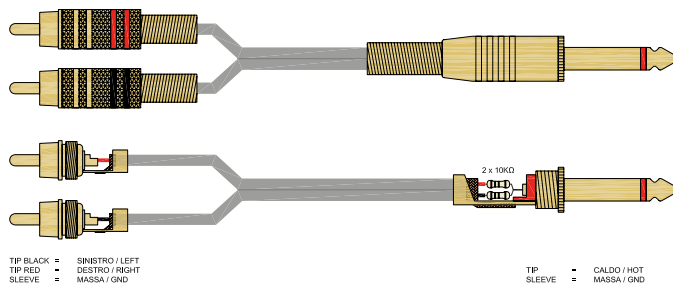


Shielded 2 wire AWG26
microphone cable

2 X RCA ST UNBAL
JACK TS MIX 10K MN UNBAL

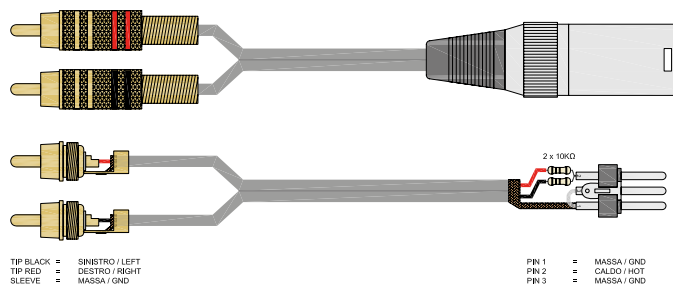

Shielded 2 wire AWG26
 microphone cable

2 X RCA ST UNBAL
XLR M 3P MIX 10K UNBAL

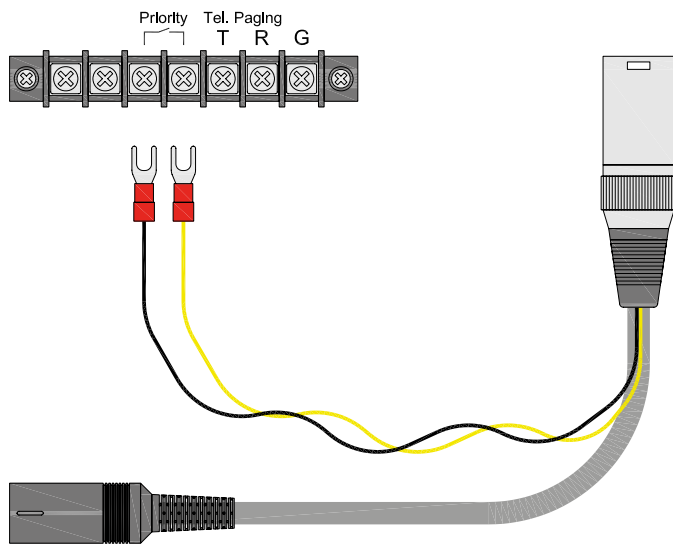

Shielded 4 wire AWG23
 microphone cable

DIN F 5P BAL
XLR M 3P BAL



Shielded 4 wire AWG23
 microphone cable

DIN F 5P BAL
XLR M 3P BAL + PRIORITY