

6W CEILING MOUNT SPEAKER

DC10 / T6

cod. 1900-210061



Ceiling rounded mount speaker for excellent playback quality of voice announcements and background music in applications that require high-fidelity sound. ABS body and metal painted grille, provided with rotary hooks for easy and quick installation in false ceilings. Complete with line transformer with selectable power for better adjustment of sound level.

6W CEILING MOUNT SPEAKER

DC20 / T6

cod. 1900-120061




Ceiling rounded mount speaker for excellent playback quality of voice announcements and background music in applications that require high-fidelity sound. Painted metal body and grille, provided with rotary hooks for easy and quick installation in false ceilings. Complete with line transformer with selectable power for better adjustment of sound level.

TECHNICAL SPECIFICATIONS

Type	recessed in false ceiling
Operating voltage	100V
RMS power	6W
Intermediate power	6/3W
Transformer impedance	1,67/3,33K Ω
Frequency response	120 + 20000Hz
S.P.L. 1W@1m	87 \pm 3dB
Speaker type	2,5" full range
Speaker impedance	8 Ω
Dimensions	ϕ 103mm x 75mm
Hole dimensions	ϕ 92mm
Material	ABS/steel
Colour	white
Weight	0,5Kg

CONNECTION

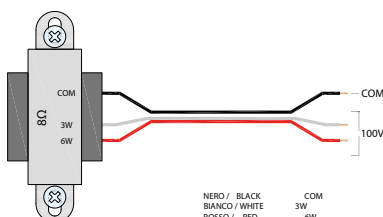

TECHNICAL SPECIFICATIONS

Type	recessed in false ceiling
Operating voltage	100V
RMS power	6W
Intermediate power	6/3/1,5W
Transformer impedance	1,67/3,33/6,66K Ω
Frequency response	110 + 15000Hz
S.P.L. 1W@1m	90 \pm 3dB
Speaker type	5" full range
Speaker impedance	8 Ω
Dimensions	ϕ 200mm x 50mm
Hole dimensions	ϕ 170mm
Material	steel
Colour	white
Weight	0,7Kg

CONNECTION

