

EN54 20W PROJECTOR SPEAKER

PSS / T20EN
cod. 1900-146201




EN54-24 certified 20W projector wall speaker, suitable for quality reproduction of announcements in those places where a high efficiency in a direction is required. It reduces the echoes from back and side walls, floors and ceilings. Aluminium bod, equipped with a "U" adjustable bracket, for an easy mounting, both indoor and outdoor. Complete with line transformer with selectable power for better sound level regulation. Dual cable gland and dual ceramic terminal block for 100V signal input and output and thermal fuse for exclusion from mains line in the event of temperatures above 150°C. Particularly suitable for emergency announcements.

TECHNICAL SPECIFICATIONS

Type	wall speaker
Operating voltage	100V
RMS power	20W
Intermediate power	20/10/5W
Transformer impedance	0,5/1/2/4KΩ
Frequency response	130 + 20000Hz
Dispersion angle	230° (1Khz) / 60° (4Khz)
S.P.L. 1W@1m	91 +3dB
Speaker	5" full range
Speaker impedance	8Ω
IP protection grade	66
Dimensions	ø146mm x 207mm
Fixing	U bracket
Material	steel
Colour	white
Weight	2,5Kg

CONNECTION

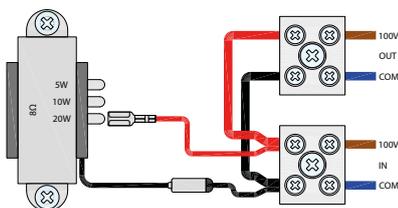

EN54 15W PROJECTOR SPEAKER

PSS / T15EN
cod. 1900-198151



EN54-24 certified 15W projector wall speaker, suitable for quality reproduction of announcements in those places where a high efficiency in a direction is required. It reduces the echoes from back and side walls, floors and ceilings. Self-extinguishing ABS body equipped with a "U" adjustable bracket, for an easy mounting, both indoor and outdoor. Complete with line transformer with selectable power for better sound level regulation. Ceramic terminal block for 100V signal input and output and thermal fuse for exclusion from mains line in the event of temperatures above 150°C. Particularly suitable for emergency announcements.

TECHNICAL SPECIFICATIONS

Type	wall/ceiling speaker
Operating voltage	100V
RMS power	15W
Intermediate power	15/10/5/2,5W
Transformer impedance	0,6/1/2/4KΩ
Frequency response	120 + 20000Hz
Dispersion angle	150° (1Khz) / 30° (4Khz)
S.P.L. 1W@1m	92 +3dB
Speaker	6,5" full range
Speaker impedance	8Ω
IP protection grade	65
Dimensions	ø198mm x 250mm
Fixing	U bracket
Material	ABS
Colour	white
Weight	2,35Kg

CONNECTION

