

6W WALL SPEAKER

DP2512 / T6

B cod. 1900-251061
N cod. 1900-251062
G cod. 1900-251063



10W WALL SPEAKER

DP2512 / T10

B cod. 1900-251101
N cod. 1900-251102
G cod. 1900-251103



20W WALL-MOUNT SPEAKER

CP / T20E

B cod. 1900-322201
N cod. 1900-322202



Wall-mount speaker for excellent playback quality of voice announcements and background music. Polycarbonate self-extinguishing body in class V2. Complete with line transformer with selectable power for better adjustment of sound level. Available in: white, black and grey. Two different versions: 6W and 10W.

20W wall speaker with excellent quality of voice announcements and background music. ABS body with painted metal grille, provided with adjustable C-bracket for easy installation on wall. Complete with line transformer with selectable power for better adjustment of sound level.

TECHNICAL SPECIFICATIONS

Type	wall-projecting
Operating voltage	100V
RMS power	6W
Intermediate power	6/3/1,5W
Transformer impedance	1,67/3,33/6,66KΩ
Frequency response	120 + 18000Hz
S.P.L. 1W@1m	92dB
Speaker type	4" bicone
Speaker impedance	4Ω
Dimensions	250x120x73mm
Max. protrusion	73mm
Material	ABS
Colour	white, black, grey
Weight	1,0Kg


TECHNICAL SPECIFICATIONS

Type	wall-projecting
Operating voltage	100V
RMS power	10W
Intermediate power	10/5/2,5W
Transformer impedance	1/2/4KΩ
Frequency response	120 + 18000Hz
S.P.L. 1W@1m	93dB
Speaker type	4" bicone
Speaker impedance	4Ω
Dimensions	250x120x73mm
Max. protrusion	73mm
Material	ABS
Colour	white, black, grey
Weight	1,0Kg


TECHNICAL SPECIFICATIONS

Type	wall
Operating voltage	100V
RMS power	20W
Intermediate power	20/10/5/2,5W
Transformer impedance	0,5/1/2/4KΩ
Frequency response	100 + 18000Hz
S.P.L. 1W@1m	89 +3dB
Speaker type	woofer 4" + tweeter 1"
Speaker impedance	8Ω
IP protection degree	50
Dimensions	160x235x145(160)mm
Fixing	C bracket
Material	ABS/steel
Colour	white, black
Weight	2,3Kg

CONNECTION

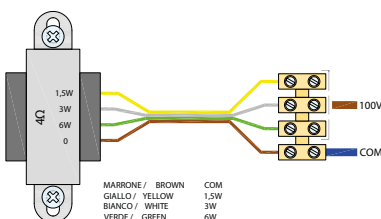

CONNECTION

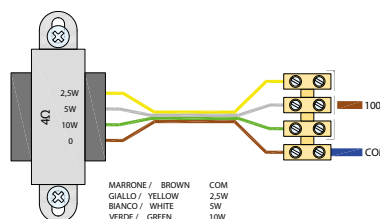

CONNECTION

