

DIFFUSORE DA INCASSO 10W

DC23 / T10
cod. 1900-123101




Ceiling rounded mount speaker for excellent playback quality of voice announcements and background music in applications that require high-fidelity sound. Painted metal body and grille, provided with rotary hooks for easy and quick installation in false ceilings. Complete with line transformer with selectable power for better adjustment of sound level.

TECHNICAL SPECIFICATIONS

Type	recessed in false ceiling
Operating voltage	100V
RMS power	10W
Intermediate power	10/5/2,5W
Transformer impedance	1/2/4KΩ
Frequency response	90 + 18000Hz
S.P.L. 1W@1m	91 +3dB
Speaker type	6" full range
Speaker impedance	8Ω
Dimensions	ø230mm x 106mm
Hole dimensions	ø200mm
Material	steel
Colour	white
Weight	1,2Kg

CONNECTION

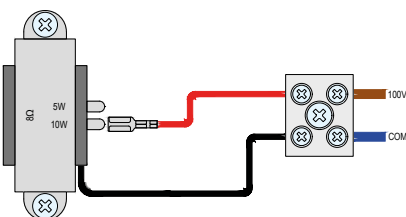

40W CEILING MOUNT SPEAKER

DCR27 / T40
cod. 1900-227401




Ceiling rounded or squared mount speaker for excellent playback quality of voice announcements and background music in applications that require high-fidelity sound. ABS body with painted metal grille, provided with rotary hooks for easy and quick installation in false ceilings. Complete with line transformer with selectable power for better adjustment of sound level.

TECHNICAL SPECIFICATIONS

Type	recessed in false ceiling
Operating voltage	100V
RMS power	40W
Intermediate power	40/20/10W
Transformer impedance	0,25/0,5/1KΩ
Frequency response	50 + 20000Hz
S.P.L. 1W@1m	95 +3dB
Speaker type	Woofer 6" + tweeter 1"
Speaker impedance	8Ω
Dimensions	ø270mm x 92mm
Hole dimensions	ø240mm
Material	steel
Colour	white
Weight	1,8Kg

CONNECTION

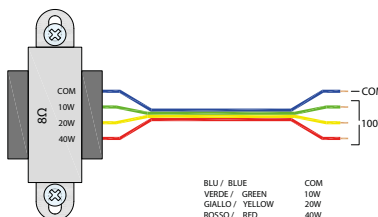

40W CEILING MOUNT SPEAKER

DCQ25 / T40
cod. 1900-254401



Ceiling rounded or squared mount speaker for excellent playback quality of voice announcements and background music in applications that require high-fidelity sound. ABS body with painted metal grille, provided with rotary hooks for easy and quick installation in false ceilings. Complete with line transformer with selectable power for better adjustment of sound level.

TECHNICAL SPECIFICATIONS

Type	recessed in false ceiling
Operating voltage	100V
RMS power	40W
Intermediate power	40/20/10W
Transformer impedance	0,25/0,5/1KΩ
Frequency response	50 + 18000Hz
S.P.L. 1W@1m	95 +3dB
Speaker type	Woofer 6" + tweeter 1"
Speaker impedance	8Ω
Dimensions	255x255x87mm
Hole dimensions	225x225mm
Material	steel
Colour	white
Weight	2,2Kg

CONNECTION

