


## 10W AMPLIFIED CEILING-MOUNT SPEAKER

**DC20 / H**

cod. 6400-120101

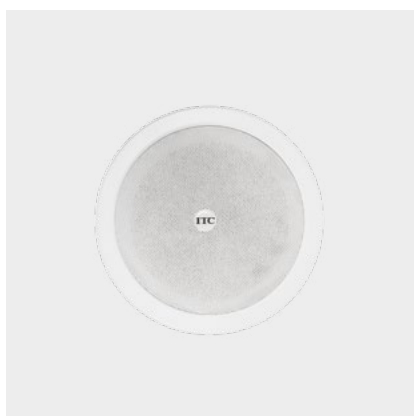

Ceiling-mount speaker for excellent playback quality of voice announcements and background music. Body and grille made of painted metal, provided with spring clips for easy installation in false ceiling. Complete with amplifier module with trimmer for better adjustment of sound level.

### TECHNICAL SPECIFICATIONS

Type	ceiling mount
Input impedance	10K $\Omega$
Input sensitivity	400mV
RMS power	10W
Power supply	18Vdc
Absorption	200mA
Frequency response	110 ÷ 15000Hz
S.P.L. 1W@1m	90 ±3dB
Speaker type	5" full range
Speaker impedance	8 $\Omega$
Dimensions	ø200mm x 50mm
Recessed hole dimensions	ø170mm
Material	metal
Colour	white
Weight	0,7Kg

## 10W AMPLIFIED WALL-MOUNT SPEAKER

**DCP2017 / H**

cod. 6400-241101



Elegant speaker characterised by excellent quality of voice announcements and background music. ABS self-extinguishing body with painted metal grille, provided with rotary hooks for easy and quick installation in false ceilings. Alternatively, it can be installed on the wall with GEWISS PT5 recessed box (not supplied). Complete with amplifier module with trimmer for better adjustment of sound level.

### TECHNICAL SPECIFICATIONS

Type	da incasso in controsoffitto
Input impedance	10K $\Omega$
Input sensitivity	400mV
RMS power	10W
Power supply	18Vdc
Absorption	200mA
Frequency response	120 ÷ 18000Hz
S.P.L. 1W@1m	93dB
Speaker type	4" bicono
Speaker impedance	4 $\Omega$
Dimensions	195x166x55mm
Recessed hole dimensions	155x125mm
Material	ABS/metal
Colour	white, black, grey
Weight	1Kg

## 10W AMPLIFIED WALL-MOUNT SPEAKER

**DP2512 / H**

cod. 6400-251101



Wall-fitted speaker for excellent playback quality of voice announcements and background music. Polycarbonate self-extinguishing body in class V2. Complete with amplifier module with trimmer for better adjustment of sound level.

### TECHNICAL SPECIFICATIONS

Type	Sporgente da parete
Input impedance	10K $\Omega$
Input sensitivity	400mV
RMS power	10W
Power supply	18Vdc
Absorption	200mA
Frequency response	120 ÷ 18000Hz
S.P.L. 1W@1m	93dB
Speaker type	4" bicono
Speaker impedance	4 $\Omega$
Dimensions	250x120x73mm
Max. protrusion	73mm
Material	ABS
Colour	white, black, grey
Weight	1Kg