

EN54 20W HORN SPEAKER

DT165 / T20EN

cod. 1900-165203




EN54-24 certified 20W horn wall speaker, suitable for quality reproduction of announcements in those places where a high acoustic performance is required. ABS body with round bell, equipped with a "U" adjustable bracket, for an easy mounting, both indoor and outdoor. Complete with line transformer with selectable power for better sound level regulation. Dual cable gland and dual ceramic terminal block for 100V signal input and output and thermal fuse for exclusion from mains line in the event of temperatures above 150°C. Particularly suitable for emergency announcements.

TECHNICAL SPECIFICATIONS

Type	wall speaker
Operating voltage	100V
RMS power	20W
Intermediate power	20/10/5/2.5W
Transformer impedance	0,5/1/2/4KΩ
Frequency response	350 + 9000Hz
S.P.L. 1W@1m	106 +3dB
Speaker	magnetic-dynamic device
Speaker impedance	8Ω
IP protection grade	66
Dimensions	ø165mm x 238mm
Fixing	U bracket
Material	ABS
Colour	grey
Weight	1,9Kg

CONNECTION

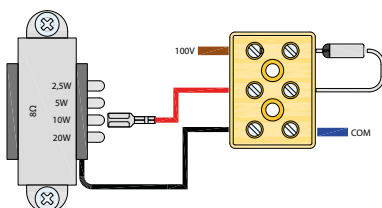

EN54 20W BIDIRECTIONAL PROJECTOR SPEAKER

SPJ-52WHBS

cod. 8105-131030



EN54-24 certified 20W bidirectional projector wall speaker, suitable for quality reproduction of announcements in those places where a high efficiency in a direction is required. It reduces the echoes from back and side walls, floors and ceilings. Aluminium body with painted metal grill, equipped with a wall bracket, for an easy mounting, both indoor and outdoor. Complete with line transformer with selectable power for better sound level regulation. Dual ceramic terminal block for 100V signal input and output and thermal fuse for exclusion from mains line in the event of temperatures above 110°C. Particularly suitable for emergency announcements.

TECHNICAL SPECIFICATIONS

Type	wall speaker
Operating voltage	100V
RMS power	20W
Intermediate power	20/10/5W
Transformer impedance	0,5/1/2/4KΩ
Frequency response	120 + 20000Hz
S.P.L. 1W@1m	89 +3dB
Speaker	5" full range
Speaker impedance	8Ω
IP protection grade	56
Dimensions	ø146mm x 186mm
Fixing	wall bracket
Material	aluminium
Colour	white
Weight	3,3Kg

CONNECTION

